

Effects of feeding rate and formula fineness degree of ring die pellet mill on mechanical property, physical quality, energy requirements, and production cost of poultry diets

Khaled A. Metwally¹, Reda I. Zaki², Sally S. Fouda³, Reem S. Alruhaimi⁴, Haifa A. Alqhtani⁴, Nouf Aldawood⁴, Ayman M. Mahmoud^{5,6}, Mohammed A. E. Naiel^{7*}

(1. Department of Soil and Water Sciences, Faculty of Technology and Development, Zagazig University, 44511, Egypt;

2. Fish Nutrition and Feed Technology Department, Central Laboratory for Aquaculture Research, Agriculture Research Center, Abbassa 44661, Abu-Hammed, Sharkia, Egypt;

3. Bio Engineering Department, Agricultural Engineering Research Institute (AENRI), Agriculture Research Center, Egypt;

4. Department of Biology, College of Science, Princess Nourah bint Abdulrahman University, Riyadh 11671, Saudi Arabia;

5. Physiology Division, Zoology Department, Faculty of Science, Beni-Suef University, Beni-Suef 62514, Egypt;

6. Department of Life Sciences, Faculty of Science and Engineering, Manchester Metropolitan University, Manchester M1 5GD, UK;

7. Department of Animal Production, Faculty of Agriculture, Zagazig University, Zagazig 44511, Egypt)

Abstract: The effect of a machine feeding rate (FR; 1, 1.5 and 2 Mg/h) and/or three levels of selected fineness degree (FD; 3, 5 and 7 mm) on machine performance, pellet physical parameters, required energy and production cost of three main types of broilers diets were examined in this experiment. The examined broiler diets were formulated to meet the Ross 308 strain requirements. A complete factorial design (3×3×3) was used to identify the effects of studied factors on the pellet mill machine and pellet production. The obtained results indicated that the pellet mill productivity significantly ($p < 0.001$) improved through increased pellet mill feeding rate level. In addition, the machine pelleting efficiency was found to be significantly affected by all studied variables and their interactions. While the total power consumption of the machine showed no variations under the impact of the tested factors or with any of their combinations. Regarding the pellet physical quality indices, all broiler diets with all selected FD and lower FR had the maximum durability and bulk density levels. Furthermore, lower feeding rates were associated with higher hardness degrees. The lowest production costs were substantially correlated with high FR and intermediate FD (5 mm). Furthermore, production costs were determined to be reduced in finisher broiler diets under different feeding rates. Moreover, manufacturing costs of finisher broiler meals were observed to decrease in several feeding rates. Overall, these findings indicate the capabilities of producing high-quality pellets and reducing the needed production costs by optimizing feeding rates to 2 Mg/h and 2 mm fineness in broiler diets.

Keywords: feeding rate, fineness degree, broiler diets, pellet quality, production cost

DOI: 10.25165/ijabe.20231603.7564

Citation: Metwally K A, Zaki R I, Fouda S S, Alruhaimi R S, Alqhtani H A, Aldawood N, et al. Effects of feeding rate and formula fineness degree of ring die pellet mill on mechanical property, physical quality, energy requirements, and production cost of poultry diets. *Int J Agric & Biol Eng*, 2023; 16(3): 30–36.

1 Introduction

Feed is widely recognized as the most expensive input element in the livestock production industry^[1]. The sale of live or slaughtered birds defines an important company's profit margin in

live production. However, enhanced profits may be increased through reduced diet formulation costs, promoted production efficiency, and decreased feed manufacturing costs^[2,3]. To realize the higher benefits of diet manufacturing, it is vital to identify the optimal level of nutritional density and to develop production techniques that produce high-quality, highly digestible pellets while using the least amount of electricity^[4,5]. Consequently, the scientists made great efforts to improve the efficiency and economy of livestock feeding by developing several methods of feed processing^[6,7].

Until now, most types of broiler rations are offered in pelleted or crumbled^[8,9]. Pelleting process is a costly procedure, but its usage is justified by performance enhancement^[10]. Pellet feeding alone is not sufficient to promote the efficiency of the consumed diet and the performance of broilers^[11,12]. The physical quality of the pellets, as well as their capability to tolerate handling pressures, must also be considered^[13]. Several recent studies have demonstrated the advantages of feeding high-quality pellets to broilers^[14-16]. In addition, healthy poultry needs an adequate amount of protein and carbohydrates, along with the necessary vitamins, dietary minerals,

Received date: 2022-03-30 **Accepted date:** 2022-12-11

Biographies: **Khaled A. Metwally**, PhD, Lecturer, research interest: agricultural and biosystems engineering, Email: khametwally@zu.edu.eg; **Reda I. Zaki**, PhD, Researcher, research interest: agricultural and biosystems engineering, Email: dr.redaibrahim@yahoo.com; **Sally S. Fouda**, PhD, Researcher, research interest: agricultural and biosystems engineering, Email: sallyfouda@yahoo.com; **Reem S. Alruhaimi**, PhD, Lecturer, research interest: biology science, Email: hsalrhemipnu.edu.sa; **Haifa A. Alqhtani**, PhD, Lecturer, research interest: biology science, Email: haalqhtani@pnu.edu.sa; **Nouf Aldawood**, PhD, Professor Assistant, research interest: biology science, Email: n.daw333@gmail.com; **Ayman M. Mahmoud**, PhD, Professor, research interest: pharmacology, life science and engineering, Email: a.mahmoud@mmu.ac.uk.

***Corresponding author:** **Mohammed A. E. Naiel**, PhD, Associate Professor, research interest: animal and fish science. Faculty of Agriculture, Zagazig University, Zagazig, 44511, Egypt. Tel: +20-1113992455, Fax: +20-552221688, Email: mohammednaiel1984@gmail.com.

and a suitable supply of water^[17,18]. The pelleting process may also result in partial protein denaturation, which has the potential to increase protein digestibility through inactivating protein enzyme inhibitors^[19]. Thus, consideration should also be paid to the possible negative outcomes of techniques used to increase pellet physical quality on nutritional availability.

Pellets should have the desired degree of hardness and be resistant to abrasion during handling and transport^[20]. Furthermore, pellet quality is heavily influenced by several factors, for instance, dietary protein, fiber and starch concentration, feedstuff particle size (fineness degree), conditioning time and temperature, ingredient moisture level, the pellet die compression rate (feeding rate), the gap between the pellet press roll and die, etc.^[21] Furthermore, there may be interactions among these elements, resulting in outcomes that differ from those predicted when individual parameters are considered^[22,23]. Although several previous studies separately examined the effects of protein level and ingredient fineness degree in the poultry industry^[24,25], scarce information is available on the effects of ingredient feeding rate, fineness degree, and several broiler diets and their interaction on pellet quality and production cost. Therefore, the current experiment was conducted to study the effects of different feeding rates, ratio protein concentration (19%, 21%, and 23%), and selected fineness degree levels (3, 5, and 7 mm) on pellet mill process, pellet physical quality and production cost in broiler diets.

2 Material and methods

2.1 Experimental design

The current experiment was conducted at a private chicken feed factory located in the Saft-Elhena village, Abou-Hamad, Sharkia, Egypt. To investigate the research variables, a full factorial random design was used. The feeding rate was examined in three levels (1 Mg/h, 1.5 Mg/h, and 2 Mg/h). Each feed rate was tested using three broiler manufactured diets (19%, 21%, and 23% CP) at three different fineness levels (3 mm, 5 mm, and 7 mm). The broiler diets that were examined were designed to meet the Ross 308 strain requirements^[26] for main nutrients (Table 1). Furthermore, all prepared diets were formulated to be isocaloric and isonitrogenous. After pelleting, a random sample of the experimental diets was collected in triplicate to determine pellet productivity, pellet efficiency, pellet bulk density, pellet durability, and pellet hardness. All diet samples were chemically analyzed to ensure that all manufactured diets had the amount of the required nutrients.

2.2 Pellet manufactured machine

In this experiment, the ring die pellet mill (Serviced Sprout-Waldron Acepellet Mill Bullrtin 5061) with a capacity of 3 Mg/h and equipped with a single conditioner to adjust the formula retention time combined with vapor was utilized. The horizontal ring die poultry feed pellet mill is made up of the following major components; pellet mill transfer gates, screw-feeding system, conditioning system, pelleting system, bearings, transmission system, and overload protection system. The screw-feeder (80 cm length and 20 cm diameter) was supplied by a 1.5 kW (2 hp) electric motor with the inverter to enable varied rotational speed ratios for running the feeding system and controlling the experiment's different feed rates.

2.3 Pellet mill performance indicators

2.3.1 Pellet mill productivity

The productivity of the machine was measured as the mass of pellets collected per hour, during the experiments the pellets were collected for a time. The machine was operated for 10 min before

Table 1 Composition and calculated nutrient content of the tested diets

Ingredient	Diet/%		
	Starter	Grower	Finisher
Yellow maize	59.86	62.14	67.29
Soybean meal (44% CP)	30.99	28.59	24.47
Poultry by-product meal	3.00	2.00	1.00
Poultry oil	2.63	3.96	4.15
Dicalcium phosphate	1.40	1.27	1.20
Calcium carbonate	1.04	1.01	0.86
Sodium chloride	0.50	0.51	0.52
DL-Methionine	0.22	0.21	0.20
L-Lysine_HCl	0.04	–	–
Vitamin and mineral premix*	0.25	0.25	0.25
Copper sulfate	0.05	0.05	0.05
Zinc sulfate	0.01	0.01	0.01
Total	100	100	100
Calculated analysis			
CP/%	23.05	21.10	19.11
ME/kcal·kg ⁻¹	3040	3160	3240
TSAA/%	0.92	0.85	0.79
Lysine/%	1.22	1.09	0.95
Calcium/%	0.90	0.80	0.70
Available phosphorus/%	0.45	0.40	0.35
Sodium/%	0.23	0.23	0.23
DM/%	87.9	88.3	88.1

Note: Vitamin and mineral premix includes per kilogram of diet: vitamin A (vitamin A acetate), 7716 IU; cholecalciferol, 2205 IU; vitamin E (source unspecified), 9.9 mg; menadione, 0.9 mg; B12, 0.01 mg; folic acid, 0.6 g; choline, 379 mg; Dpantothenic acid, 8.8 mg; riboflavin, 5.0 mg; niacin, 33 mg; thiamin, 1.0 mg; D-biotin, 0.06 mg; pyridoxine, 0.9 mg; ethoxyquin, 28 mg; manganese, 55 mg; zinc, 50 mg; iron, 28 mg; copper, 4 mg; iodine, 0.5 mg; selenium, 0.1 mg.

taking any samples to have a steady experimental condition the pellet mill productivity was calculated according to the following formula:

$$PMP = \frac{W_p}{T} \times 3.6 \quad (1)$$

where, PMP is pellet mill productivity, kg/h; W_p is the total production of pellet, g; T is the consumed time, s.

2.3.2 Pelleting efficiency

Pelleting efficiency is the ratio of quantity of actual feed pellets obtained at the main pellet outlet after screening to the total feed input for a given unit of time. The feed mixture retained in the pelleting chamber was manually removed and weighed at the end of every experiment. The quantity of feed pelleted as well as retained, in comparison with the total mass of feed mixture fed to pelletizer, was used to calculate pelleting efficiency of the pelletizer. The efficiency of pelleting machine was determined by Shrinivasa et al.^[27]

$$PE = \frac{W_p}{W_m} \times 100\% \quad (2)$$

where, PE is pelleting efficiency, %; W_m is total feed mass input, kg.

2.3.3 Total consumed power

The power factor of the inductive cycle drive motor was not measured directly. However, the motor specification stated a power factor of 0.817 under full load followed by Li et al.^[28]:

$$TCP = \frac{\sqrt{3}IVPf}{1000} \quad (3)$$

where, TCP is total consumed power, kW; I is the line current, A; V is the line voltage, V; and Pf is the power factor.

2.3.4 Specific Energy Requirements

The mass flow rate of the pellets was estimated by monitoring pellet production under steady-state conditions to estimate the specific energy consumption per unit mass of pellets produced. The specific energy consumption was calculated by combining this data with the average overall power consumption recorded. Specific energy demand values were calculated using the following equation:

$$SER = \frac{TCP}{EP} \quad (4)$$

where, SER is the specific energy requirement, kW/Mg·h; TCP is the total consumed power, kW; EP is extruder productivity, Mg/h.

2.4 Physical pellet quality indicators

2.4.1 Pellet bulk density

A container of known mass and volume, loosely filled with feed mixture to measure bulk density. The mixture was poured into the container from a height of 15 cm to facilitate the free flowing of the samples until the container overflowed. By striking a straight edge across the top, the excess material was removed. The weight of the material in the container was recorded. The net weight of the sample was obtained by subtracting the weight of the empty container. Pellet bulk density (PBD) was calculated by dividing the mass over the container volume as ascribed by the following equation:

$$PBD = \frac{W_d}{V_d} \quad (5)$$

where, PBD is pellet bulk density, g/cm³; W_d is the pellet sample mass, g; V_d is the pellet sample volume, cm³.

2.4.2 Pellet durability

The durability of pellets was determined according to ASAE standard method^[29]. To eliminate fines, the pellets were sieved through a suitable sieve. A sample mass of 500 g placed in the tumbling box or shaker device (consists of three cells; 14 mm×13 mm×12 mm) rotated at a constant speed of 60 r/min and has 0.5 hp motor power) for tumbling for up to 10 min. Then, the sample will be removed, sieved and the percent of whole pellets calculated according to the following equation:

$$PD = \frac{W_a}{W_b} \times 100\% \quad (6)$$

where, PD is pellet durability, %; W_a is pellet weight after shaker treatment, g; W_b is pellet weight before shaker treatment, g.

2.4.3 Pellet hardness

Before testing the uniform feed pellets, five pellets of about standard length (1.5 cm) from each batch were selected and tested by measuring the force of the initial fracture of individual pellets. Pellet hardness was tested using a SHIMPO digital force gauge (ELECTROMATIC Equip't Co., 175 Vincent Ave Lynbrook, NY 11563 USA) with an accuracy of 0.1 N and a conical head.

2.5 Pelleting production cost

The total cost of farm machinery had been divided into two main categories:

Ownership costs (fixed costs):

1) Depreciation is a cost resulting from wear, obsolescence, and age of a machine, before an estimate of annual depreciation can be calculated, an economic life for the machine and a salvage value at the end of the economic life needs to be specified, besides the remaining salvage value as a percent of new list price.

$$\text{Total depreciation} = \text{purchase price} - \text{salvage value}$$

Remaining salvage value = current list price × remaining value factor

The economic life of a machine is the number of years over which costs are to be estimated (10 years). While the remaining salvage value is an estimate of the sale value of the machine at the end of its economic life. It is the amount you could expect to receive as a trade-in allowance, an estimate of the used market value if you expect to sell the machine outright, or zero if you plan to keep the machine until it is worn out. For the pellet mill, the salvage value after ten years is estimated as 35% of the new list price (purchase price = current list price)^[30].

2) Interest on investment, housing, taxes and insurance, (IHTI): It was estimated 13.8 % of the remaining salvage value^[31].

Operation costs (Variable costs):

1) Repairs and maintenance (R and M): Repair costs are very high in developing countries and contribute significantly to the total cost. It was estimated 50% of the initial value, spread over the life of the machine, has been taken^[32];

2) Fuel (Power cost) consumption, L.E./h (1.15 L.E./kW);

3) Lubrication costs for a machine are equal to 10% of fuel cost;

4) Labor cost: The operator's salary is about 3500 L.E./month

$$\text{Total cost per hours(L.E./h)} = \text{Fixed cost(L.E./h)} +$$

$$\text{Operating costs(L.E./h)}$$

Finally, the total production cost was calculated according to the following equations used by Mani et al.^[33]:

$$\text{Production cost} = \frac{\text{Total cost per hour}}{\text{Productivity}}$$

where, the unit of production cost is L.E./Mg; the unit of total cost per hour is L.E./h, the unit of productivity is Mg/h.

2.6 Statistical analysis

A full factorial design using SPSS V22 was used to analyze data in a completely randomized design. The Kolmogorov-Smirnov and Shapiro-Wilk tests were used to determine the normality and homogeneity of the data. All obtained data were displayed as mean±standard deviation mean (SDM). The significance of a difference was determined by $p < 0.05$. Pearson's correlation coefficient test was used to calculate the correlation coefficient between all measurements. To evaluate the relationship between chosen variables, a linear regression model was applied.

3 Results

3.1 Machine operating parameters

The influence of pellet mill feeding rate (FR), ration protein percentage (PD, %), and fineness degree (FD) on pellet mill productivity, pelleting efficiency, and total consumed power are listed in Table 2. The pellet mill productivity significantly ($p < 0.001$) was promoted by the highest pellet mill feeding rate level. While, the machine pelleting efficiency was found to be significantly affected by all studied variables (FR, PD, % and FD) and their interactions. Pelleting efficiency was higher in starting broiler diets with high FD (7 mm) and moderate FR (1.5 Mg/h). On the other hand, the total consumed power of the machine was shown to be significantly influenced by all evaluated factors, with no changes in any of their interactions.

3.2 Pellet quality measurements

The effect of pellet mill feeding rate (FR), ration protein percentage (PD, %), and fineness degree (FD) on the pellet quality parameters (pellet bulk density, durability, and hardness) are

Table 2 Effect of pellet mill feeding rate, ration protein, and fineness degree on pellet mill productivity, pelleting efficiency and total consumed power

FR/ Mg·h ⁻¹	RPC/ %	RFD/ mm	Measurements (n=3)			
			PMP/Mg·h ⁻¹	PE/%	TCP/kW	
1.0	19	3	0.95	94.63	18.99	
		5	0.95	94.85	21.51	
		7	0.86	94.46	24.02	
	21	3	5	0.95	94.52	26.17
			7	0.96	95.07	29.22
			3	0.95	95.63	32.80
		23	5	0.95	95.07	34.59
			7	0.95	94.53	37.64
			3	0.96	95.84	39.79
	1.5	19	3	1.45	96.48	23.66
			5	1.46	96.84	26.35
			7	1.46	96.91	28.50
21		3	5	1.46	96.83	30.65
			7	1.46	97.19	33.16
			3	1.47	97.82	37.28
		23	5	1.46	97.19	39.25
			7	1.47	97.82	42.12
			3	1.47	98.61	43.91
2.0	19	3	1.93	96.32	27.24	
		5	1.92	95.81	29.40	
		7	1.95	97.33	32.26	
	21	3	5	1.93	96.00	34.59
			7	1.92	95.48	37.46
			3	1.94	96.62	41.41
		23	5	1.91	95.21	42.84
			7	1.94	96.61	45.88
			3	1.95	97.36	48.21
SDM			0.008	0.105	1.821	

Note: FR: Feeding Rate, Mg/h; RPC: Ration Protein Concentrate, %; RFD: Ration Fineness Degree, mm; PMP: Pellet Mill Productivity, Mg; PE: Pelleting Efficiency, %; TCP: Total Consumed Power, kW.

presented in Table 3. The results showed that all of the factors tested and their interactions considerably improved pellet bulk density and pellet durability percentage. All tested broiler diets with all selected FD and lower FR had the highest pellet durability and bulk density levels. Conversely, the feeding rate was shown to be the only factor that significantly increased the hardness degree, whereas other factors had no influence. Lower feeding rates were shown to be related to increased hardness levels.

3.3 Pellet production energy requirement and cost

The influence of pellet mill feeding rate (FR), ration protein percentage (PD, %) and fineness degree (FD) on the specific energy requirement and hourly and production cost existing in Table 4. The obtained results indicated higher significant effects ($p < 0.001$) in specific energy requirements and hourly and production costs. Furthermore, the interaction between feeding rate and varied protein ratios or fineness degrees improved specified energy demand levels and lowered production costs. The lowest production cost was

Table 3 Effect of pellet mill feeding rate, ration protein (%), and fineness degree on pellet bulk density, durability, and hardness

FR/ Mg·h ⁻¹	RPC/ %	RFD/ mm	Measurements (n=3)			
			PBD/kg·m ⁻³	PD/%	pH/N	
1.0	19	3	750	90	122.7	
		5	840	90	97.8	
		7	830	91	93.2	
	21	3	5	860	90.7	125.2
			7	870	91.7	104.9
			3	905	90	98.4
		23	5	880	95	127.9
			7	850	93	103.3
			3	850	90	103.0
	1.5	19	3	752	83	97.8
			5	750	80	92.9
			7	790	80	88.2
21		3	5	748	92	110.4
			7	755	88	100.8
			3	805	82	98.2
		23	5	730	87	112.8
			7	860	85	105.1
			3	740	80	101.3
2.0	19	3	715	80	85.8	
		5	718	76	80.6	
		7	719	75	75.9	
	21	3	5	690	80	78.5
			7	695	81	73.5
			3	680	79	76.1
		23	5	695	90	73.9
			7	680	92	71.3
			3	683	81	71.1
SDM			1.01	1.07	24.6	

Note: FR: Feeding Rate, Mg/h; RPC: Ration Protein Concentrate, %; RFD: Ration Fineness Degree, mm; PBD: Pellet Bulk Density, kg/m³; PD: Pellet Durability, %; PH: Pellet Hardness, SDM, standard division mean.

shown to be highly associated with a high feeding rate and a medium fineness degree (5 mm). Besides, the production cost was found to be lower in finisher broiler diets under different feeding rates. Moreover, the production costs of finisher broiler diets were shown to be decreased in various feeding rates.

3.4 Statistical relation between measurements

Table 5 displays Pearson's correlation coefficients (r) between ring die pellet mill performance, physical pellet quality criteria, specific energy, and cost indices. The production cost positively significantly correlated with all pellet quality measurement (pellet bulk density, durability and hardness) and specific energy requirement. On the other hand, total power consumption was not statistically correlated to the cost of production of pellets. The machine operating parameters were negatively correlated with the cost of producing pellets.

Polynomial regressions analysis ($p < 0.05$) between Feeding rate and Fineness degree levels of poultry diets and pellet durability were

Table 4 Effect of pellet mill feeding rate, ration protein (%) and fineness degree on specific energy requirement and hourly and production cost

FR/ Mg·h ⁻¹	RPC/ %	RFD/ mm	Measurements (n=3)			
			SER /kWh·Mg ⁻¹	HC /L.E.·h ⁻¹	PC/ L.E.·Mg ⁻¹	
1.0	19	3	20.0	44.6	47.0	
		5	22.6	47.8	50.2	
		7	29.3	51.0	61.9	
	21	3	27.6	53.7	56.6	
			5	30.6	57.5	60.3
			7	34.2	62.1	64.7
		23	3	36.3	64.3	67.5
			5	39.6	68.2	71.7
			7	41.4	70.9	73.8
	1.5	19	3	16.3	50.5	34.9
			5	18.1	53.9	37.1
			7	19.6	56.6	38.9
21		3	21.1	59.4	40.8	
			5	22.7	62.5	42.8
			7	25.4	67.7	46.1
		23	3	26.9	70.2	48.1
			5	28.6	73.9	50.2
			7	29.9	76.1	51.8
2.0	19	3	14.1	55.1	28.5	
		5	15.3	57.8	30.1	
		7	16.5	61.4	31.5	
	21	3	18.0	64.3	33.4	
		5	19.6	68.0	35.5	
		7	21.4	73.0	37.7	
23	3	22.4	74.8	39.1		
	5	23.6	78.6	40.5		
	7	24.7	81.6	41.8		
SDM			1.611	2.285	2.244	

A full factorial design analysis (p value)

FR	<0.001	<0.001	<0.001
RPC	<0.001	<0.001	<0.001
RFD	<0.001	<0.001	<0.001
FR×RPC	0.001	0.990	0.050
FR×RFD	0.057	0.998	0.097
RPC×RFD	0.757	0.525	0.688
FR×RPC×RFD	0.919	1.000	0.772

Note: FR: Feeding Rate, Mg/h; RPC: Ration Protein Concentrate, %; RFD: Ration Fineness Degree, mm; SER: Specific Energy Requirement, kWh/Mg; HC: Hourly Cost, L.E./h; PC: Production Cost, L.E./Mg

illustrated in Figure 1. According to the regression findings, 2 Mg/h FR and 2 mm FD provided good pellet durability. Also, Polynomial regression analysis ($p < 0.05$) between Feeding rate and Fineness degree levels of poultry diets, and pellet hardness were exemplified in Figure 2. Under a high feeding rate (2 Mg/h) and medium fineness degree (2 mm), the estimated equation derived from the regression analysis produced the optimal hardness level (Figure 3).

4 Discussion

The present study examined the effect of various feeding rates and graded levels of ingredient fineness degree using three different types of broiler diets on machine operating parameters, pellet physical quality, pellet manufacturing requirements, and production cost. According to the polynomial regressions used to estimate the relationship between pellet durability percentage or hardness degree with feeding rate levels and ingredient fineness degree, a 2 Mg/h FR and 2 mm FD are ideal for high pellet quality production in all types of broiler diets.


The most common type of broiler diet is pellets. When compared to mash diets, fed broiler on pelleted diets improves performance and feed efficiency^[5]. However, productivity enhancements are reliant on pellet quality^[34]. According to our study results, the machine operating measurements such as pelleting efficiency significantly improved in starting broiler diets under high FD (7 mm) and moderate FR (1.5 Mg/h). These results were in similarity to Abo-Habaga et al.^[31] finding that the maximum value of pelleting machine productivity was recorded (40.220 kg/h) at die speed 190 r/min., 5 mm die holes' diameter, and 28% moisture content of feed mixture with gelatin as an adhesive ingredient in diet formula. In addition, the increments in production rate caused by raising the machine feeding rate from 200 to 400 kg/h may be attributed to increasing the mass of the formula between the rollers gap, which causes rollers to compress in time unit^[35]. In general, increasing the level of feeding rate up to 500 kg/h was found to reduce machine productivity, which may be ascribed to an excess of mass in front of the rollers, causing the rollers to slide^[31]. Therefore, it was shown that determining the optimal operational parameters, namely roller speed and feeding rate, may promote the performance of pelleting machines.

Improving pellet durability is an effective method of reducing fines. The pellet's durability may be affected by the diet composition^[36]. Moreover, using raw materials with high binding ability, such as wheat, barley, and rape, was also shown to affect the durability percentage of the generated pellets^[37]. While Feed rate levels will also affect pellet durability and may be less costly than

Table 5 Pearson's correlation coefficients (r) among ring die pellet mill performance, physical pellet quality parameters, specific energy and cost indices


	PMP	PE	TCP	SER	PBD	PD	PH	HC	PC
PMP	1	0.520**	0.446**	-0.657**	-0.870**	-0.689**	-0.506**	0.446**	-0.828**
PE		1	0.461**	-0.257*	-0.371**	-0.604**	-0.174NS	0.461**	-0.424**
TCP			1	0.340**	-0.289**	-0.708**	-0.241*	1.000**	0.081 ^{NS}
SER				1	0.683**	0.194 ^{NS}	0.307**	0.340**	0.962**
PBD					1	0.556**	0.428**	-0.289**	0.794**
PD						1	0.432**	-0.708**	0.392**
PH							1	-0.241*	0.389**
HC								1	0.081 ^{NS}
PC									1

Note: PMP, Pellet Mill Productivity; PE, Pelleting Efficiency; TCP, Total Consumed Power; SER, Specific Energy Requirement; PBD, Pellet Bulk Density; PD, Pellet Durability; PH, Pellet Hardness; HC, Hourly Cost; PC, Production Cost. *: $p < 0.05$, **: $p < 0.01$, ***: $p < 0.001$ and NS: Not significant

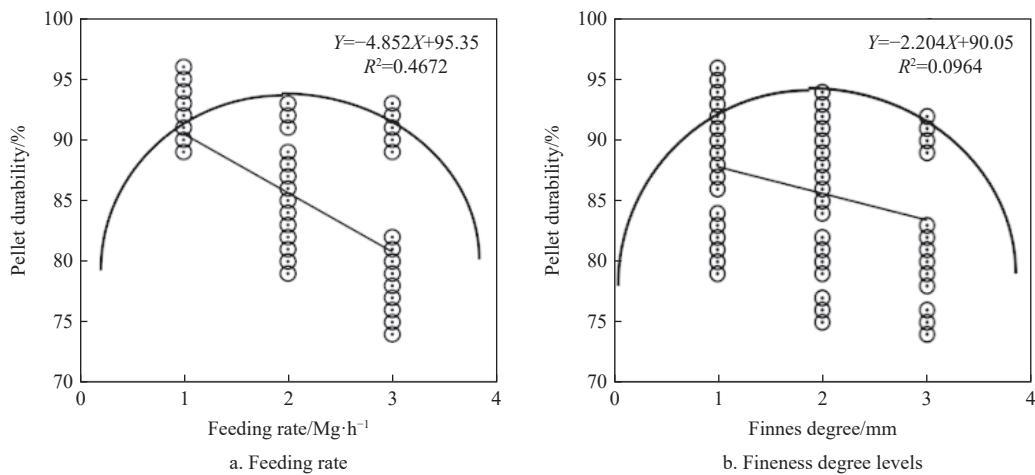

Note: Values expressed as means±SD.

Figure 1 Polynomial regressions analysis ($p < 0.05$) between feeding rate and fineness degree levels of poultry diets, and pellet durability

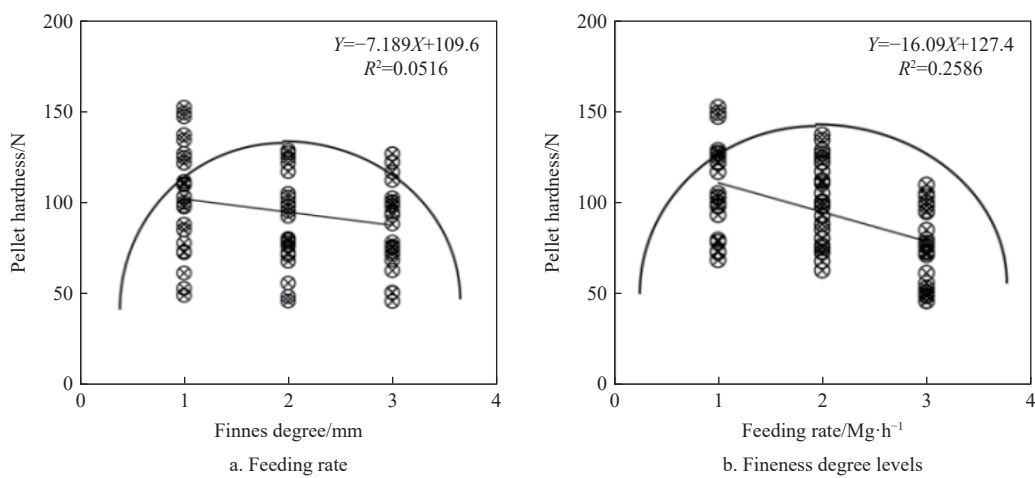

Note: Values expressed as means±SD.

Figure 2 Polynomial regressions analysis ($p < 0.05$) between feeding rate and fineness degree levels of poultry diets, and pellet hardness

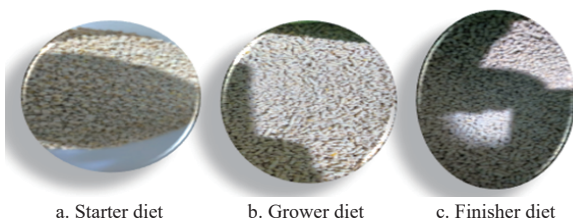


Figure 3 Higher quality of pellets and lower production costs achieved under 2 Mg/h feeding rates and 2 mm fineness degree in broiler diets

replacing raw ingredients or using pellet binders^[38]. Our study results suggested that the best pellet durability, hardness, and bulk density levels could be obtained in all tested broiler diets under all tested FD and lower FR. These results were found to be in line with Abdel Wahab et al.^[39] and Said et al.^[40] finding. The improvement in pellet durability due to increased feeding rate and decreasing fineness degree may be ascribed to the larger compact of the formula within die holes, which reduces porosity between formula granules and produces un-fractured pellets with higher pellet resistance^[35].

Morad and El-Maghawry^[41] proved that specific mechanical energy values were reduced by rising ingredient fed rate up to 3.0 and 2.0 Mg/h for cattle and rabbit feed pellets, respectively. Any further increments in the machine feeding rate (3.0 Mg/h) could

significantly increase the specific mechanical energy and production cost. According to our findings, the high feeding rate (1.5 Mg/h) and a medium fineness degree (5 mm) reduced the total production cost. Our study's findings were consistent with the results of Singh^[42] and Domenech et al.^[43]. The required consumption power increased as the feed rate increased owing to the higher ingredient flow through the extruder screw towards the die at the same time unit, creating a considerable strain on the screws shaft and requiring more power^[44]. Besides, higher formula feed rates than the optimum value (1.5 Mg/h for broiler feed pellets) tend to increase energy due to the substantial increase in power required relative to the higher in extruder productivity. Furthermore, friction force induced between formula particles under low fineness degrees tends to enlarge the required power, resulting in high specific mechanical energy^[43].

5 Conclusions

Based on the research findings, it can be concluded that the optimum values of productivity, pelleting efficiency, pellet durability, specific mechanical energy, and pelleting cost could be achieved while pelleting broiler feed pellets at a feed rate of 1.5 Mg/h and a fineness degree of 5 mm.

[References]

[1] Seidavi A, Tavakoli M, Asroosh F, Scanes C G, Abd El-Hack M E, Naiel M A, et al. Antioxidant and antimicrobial activities of phytonutrients as

- antibiotic substitutes in poultry feed. *Environ Sci & Poll Res*, 2022; 29: 5006–5031.
- [2] Danwe A, Finlak E. Performance and economic approach to broiler finisher for sustainable poultry venture. *J Agric & Vet Sci*, 2014; 6(2): 59–66.
- [3] Seidavi A, Azizi M, Swelum A A, Abd El-Hack M E, Naiel M A. Practical application of some common agro-processing wastes in poultry diets. *World's Poult Sci J*, 2021; 77(4): 913–927.
- [4] Baxevanou C, Fidaros D, Bartzanas T, Kittas C. Energy consumption and energy saving measures in poultry. *Energy & Environ Eng*, 2017; 5(2): 29–36.
- [5] Suliman G M, Alowaimier A N, Al-Mufarrej S I, Hussein E O, Fazea E H, Naiel M A. The effects of clove seed (*Syzygium aromaticum*) dietary administration on carcass characteristics, meat quality, and sensory attributes of broiler chickens. *Poult Sci*, 2021; 100(3): 100904.
- [6] Svihus B, Klovstad K, Perez V, Zimonja O, Sahlström S, Schüller R, et al. Physical and nutritional effects of pelleting of broiler chicken diets made from wheat ground to different coarsenesses by the use of roller mill and hammer mill. *Ani Feed Sci & Technol*, 2004; 117(3-4): 281–293.
- [7] Abdollahi M, Ravindran V, Wester T, Ravindran G, Thomas D. Influence of conditioning temperature on performance, apparent metabolisable energy, ileal digestibility of starch and nitrogen and the quality of pellets, in broiler starters fed maize-and sorghum-based diets. *Ani Feed Sci & Technol*, 2010; 162(3-4): 106–115.
- [8] Naderinejad S, Zaefarian F, Abdollahi M, Hassanabadi A, Kermanshahi H, Ravindran V. Influence of feed form and particle size on performance, nutrient utilisation, and gastrointestinal tract development and morphometry in broiler starters fed maize-based diets. *Ani Feed Sci & Technol*, 2016; 215: 92–104.
- [9] Dosoky W M, Zeweil H S, Ahmed M H, Zahran S M, Ali A M, Abdelsalam N R, et al. The influences of tylosine and licorice dietary supplementation in terms of the productive performance, serum parameters, egg yolk lipid profile, antioxidant and immunity status of laying Japanese quail under heat stress condition. *Journal of Thermal Biology*, 2021; 99: 103015.
- [10] Sibanda T Z, Ruhnke I. The impact of feed treatment on the performance of broilers: A review. *Lohmann Information*, 2017; 51(2): 18–29.
- [11] Jensen L. Influence of pelleting on the nutritional needs of poultry. *Asian-Australasian J Ani Sci*, 2000; 13: 35–46.
- [12] Sakr S A, El-Emam H A, Naiel M A, Wahed N M, Zaher H A, Abogabal M S, et al. The impact of paulownia leaves extract enriched diets on performance, blood biochemical, antioxidant, immunological indices and related gene expression of broilers. *Front Vet Sci*, 2022; 9: 859.
- [13] Abdollahi M, Ravindran V, Svihus B. Pelleting of broiler diets: An overview with emphasis on pellet quality and nutritional value. *Ani Feed Sci & Technol*, 2013; 179(1-4): 1–23.
- [14] Corzo A, Mejia L, Loar R. Effect of pellet quality on various broiler production parameters. *J Appl Poult Res*, 2011; 20(1): 68–74.
- [15] Neves D, Banhazi T, Nääs I. Feeding behaviour of broiler chickens: a review on the biomechanical characteristics. *Brazilian J Poult Sci*, 2014; 16(2): 1–16.
- [16] Idan F, Nortey T, Paulk C, Beyer R, Stark C. Evaluating the effect of feeding starters crumbles on the overall performance of broilers raised for 42 days. *J Appl Poult Res*, 2020; 29(3): 692–699.
- [17] Pesti G, Vedenov D, Cason J, Billard L. A comparison of methods to estimate nutritional requirements from experimental data. *British Poult Sci*, 2009; 50(1): 16–32.
- [18] Ghanima M M A, Abd El-Hack M E, Abougabal M Sh, Taha A E, Tufarelli V, Laudadio V, et al. Growth, carcass traits, immunity and oxidative status of broilers exposed to continuous or intermittent lighting programs. *Ani Biosci*, 2021; 34(7): 1243–1252.
- [19] Netto M T, Massuquetto A, Krabbe E, Surek D, Oliveira S, Maiorka A. Effect of conditioning temperature on pellet quality, diet digestibility, and broiler performance. *J Appl Poult Res*, 2019; 28(4): 963–973.
- [20] Muramatsu K, Massuquetto A, Dahlke F, Maiorka A. Factors that affect pellet quality: A review. *J Agric Sci & Technol*, 2015; 5: 717–722.
- [21] Abdollahi M, Zaefarian F, Ravindran V. Feed intake response of broilers: Impact of feed processing. *Ani Feed Sci & Technol*, 2018; 237: 154–165.
- [22] Abdollahi M R, Zaefarian F, Ravindran V. Maximising the benefits of pelleting diets for modern broilers. *Ani Prod Sci*, 2019; 59(11): 2023–2028.
- [23] Abdollahi M, Ravindran V, Wester T, Ravindran G, Thomas D. Influence of feed form and conditioning temperature on performance, apparent metabolisable energy and ileal digestibility of starch and nitrogen in broiler starters fed wheat-based diet. *Ani Feed Sci & Technol*, 2011; 168(1-2): 88–99.
- [24] Clark P, Behnke K, Fahrenholz A. Effects of feeding cracked corn and concentrate protein pellets on broiler growth performance. *J Appl Poult Res*, 2009; 18(2): 259–268.
- [25] Faraj H A, Rashid S A. Effect of mash and pellet diets with different levels of protein and energy on broiler performance in finisher period. *J Ani & Poult Prod*, 2019; 10(9): 279–283.
- [26] ROSS. Ross 308 Broiler: Nutrition specification. Ross Breeders Limited Newbridge, Midlothian, Scotland, UK, 2007.
- [27] Shrinivasa D, Mathur S M, Khadatkar A. Design and evaluation of portable compound cattle feed pelleting machine for farm-level feed production. *J Scientific & Industrial Res (JSIR)*, 2021; 80(2): 105–114.
- [28] Li Y, Liu M, Lau J, Zhang B. A novel method to determine the motor efficiency under variable speed operations and partial load conditions. *Appl Energy*, 2015; 144: 234–240.
- [29] Temmerman M, Rabier F, Jensen P D, Hartmann H, Böhm T. Comparative study of durability test methods for pellets and briquettes. *Biomass & Bioenergy*, 2006; 30(11): 964–972.
- [30] Huffman R. L, Fangmeier D D, Elliot W J, Workman S R, Schwab G. Soil and water conservation engineering. ASABE, St. Joseph, 2011.
- [31] Abo-Habaga M, Bahnassi A, ElShabrawy T, ElHaddad A. Performance evaluation of pellets forming unit in local feed pelleting machine. *J Soil Sci & Agric Eng*, 2017; 8(9): 431–435.
- [32] Kaul R, Egbo C. Introduction to agricultural mechanisation. London, U. K., England Macmillan, 1985; 193p.
- [33] Mani S, Sokhansanj S, Bi X, Turhollow A. Economics of producing fuel pellets from biomass. *Appl Eng Agric*, 2006; 22(3): 421–426.
- [34] Buchanan N, Moritz J. Main effects and interactions of varying formulation protein, fiber, and moisture on feed manufacture and pellet quality. *J Appl Poult Res*, 2009; 18(2): 274–283.
- [35] Kaddour U, Elmetwalli A. Manufacturing and identifying the optimum operating parameters of a local pellet mill machine to produce aquatic feed. *Misr J Agric Eng*, 2015; 32(1): 87–104.
- [36] Saleh A A, Elnagar A M, Eid Y Z, Ebeid T A, Amber K A. Effect of feeding wheat middlings and calcium lignosulfonate as pellet binders on pellet quality growth performance and lipid peroxidation in broiler chickens. *Vet Med & Sci*, 2021; 7: 194–203.
- [37] Carroll J P, Finnan J. Physical and chemical properties of pellets from energy crops and cereal straws. *Biosys Eng*, 2012; 112(2): 151–159.
- [38] Tumuluru J S, Conner C C, Hoover A N. Method to produce durable pellets at lower energy consumption using high moisture corn stover and a corn starch binder in a flat die pellet mill. *J Visualized Exp*, 2016; 112: e54092.
- [39] Abdel Wahab M, Tawfik M, El Shal A, El Hussiny Y. Factors affecting the performance of aquatic feeds flat-die pelleting machine. *Misr J Agric Eng*, 2011; 28(1): 129–148.
- [40] Said N, García-Maraver A, Zamorano M. Influence of densification parameters on quality properties of rice straw pellets. *Fuel Proc Technol*, 2015; (138): 56–64.
- [41] Morad M, El-Maghawry H A. Manufacturing and assesment of a local ring die extruder for producing different kinds of animal feed pellets. *Misr J Agric Eng*, 2016; 33(3): 1089–1108.
- [42] Singh S K. Understanding the effect of extrusion processing parameters on physical, nutritional and rheological properties of soy white flakes based aquafeed in a single screw extruder. South Dakota State University, 2016.
- [43] Domenech T, Peuvrel-Disdier E, Vergnes B. The importance of specific mechanical energy during twin screw extrusion of organoclay based polypropylene nanocomposites. *Composites Sci & Technol*, 2013; 75: 7–14.
- [44] Chang Y, Martinez-Bustos F, Park T, Kokini J. The influence of specific mechanical energy on cornmeal viscosity measured by an on-line system during twin-screw extrusion. *Brazilian J Chem Eng*, 1999; 16(3): 285–295.